
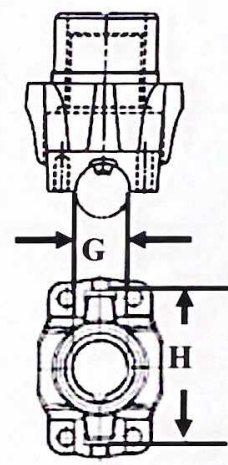


Name \_\_\_\_\_  
 Work order # \_\_\_\_\_

Date \_\_\_\_\_  
 Phone \_\_\_\_\_

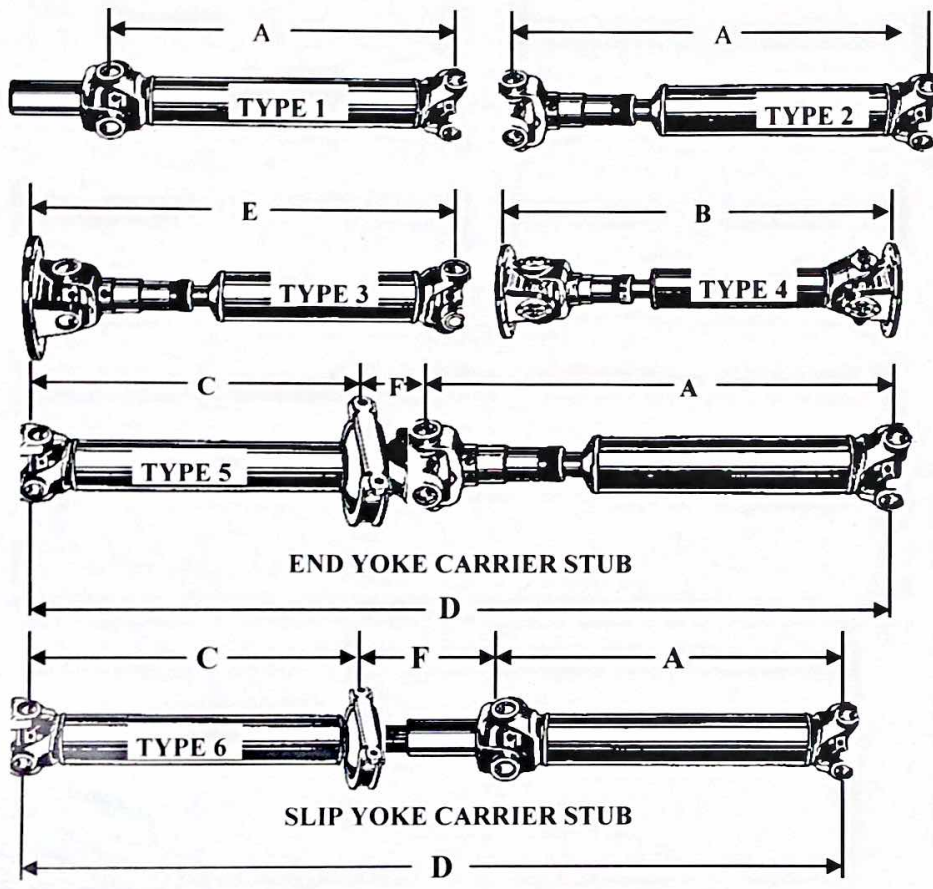

Shaft Type #	Measurement
A	_____
B	_____
C	_____
D	_____
E	_____
F	_____
G	_____
H	_____

Instructions: All measurements are in running position with the wheels on the ground. The (A) measurement is always from center of U-joint to center of U-joint.

The (B) measurement is always from face of flange to face of flange.

The (C) measurement is always from center of U-joint to center of carrier bearing. See note below.

The (D) measurement is always from center of U-joint on the transmission to center of U-joint on the differential.

The (E) measurement is always from face of flange to center of U-joint.

For PTO shafts, the measurement is always the distance between the end of the PTO output shaft and the end of pump shaft.

For Type 1, push the slip into the transmission completely and then pull back out 1". Then, take your measurement. Remember, all wheels must be on the ground, just like they would be if you were driving down the road.

Note: When building a type 5 or type 6 carrier bearing shaft half only, the (F) measurement is also needed.

**SEE REVERSE SIDE FOR MAXIMUM LENGTH OF SHAFT ACCORDING TO RPM.**

**WARNING!**  
**MAXIMUM DRIVE SHAFT LENGTH IS LIMITED BY**  
**MAXIMUM ENGINE RPMS, U-JOINT SERIES AND TUBE**  
**SIZE (SEE BELOW).**

TUBING Diameter & Wall Thickness W—Welded S—Seamless	INSTALLED LENGTH IN INCHES.											
	ACCORDING TO THE MEASUREMENTS ON THE REVERSE SIDE.											
	RPM— REVOLUTIONS PER MINUTE											
	500	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000
<b>1000 SERIES</b>												
1 3/4" x .065" W.....	117	82	67	58	52	...	...	...	...	...	...	...
<b>1100 SERIES</b>												
1 1/4" x .095" S.....	91	64	52	45	40	37	34	32	...	...	...	...
<b>1260, 1270, 1280, 1310, 1330, SPL22 &amp; SPL25 SERIES</b>												
2" x .083" W (S).....	122	87	70	62	55	50	45	43	41	39	37	35
2 1/2" x .065" W (S).....	138	98	81	70	62	57	53	49	46	44	42	40
2 3/4" x .065" W.....	145	103	84	73	65	60	55	52	49	46	44	42
3" x .065" W.....	152	108	89	77	69	63	58	54	51	48	46	44
3 1/2" x .065" W.....	165	117	96	83	74	68	63	59	55	53	50	48
4" x .083" W.....	176	125	103	89	80	73	67	63	59	56	53	51
4 1/2" x .095" W.....	188	133	107	94	83	76	70	66	62	59	56	53
<b>1350, 1410, SPL30 &amp; SPL36 SERIES</b>												
2 1/2" x .083" W.....	138	98	81	70	62	57	53	49	46	44	...	...
3" x .083" W.....	152	108	89	77	69	63	58	54	51	48	...	...
3 1/2" x .065" W.....	165	117	96	83	74	68	63	59	55	53	...	...
4" x .083" W.....	176	125	103	89	80	73	67	63	59	56	...	...
4 1/2" x .095" W.....	188	133	107	94	83	76	70	66	62	59	...	...
<b>1480, 1500, 1550, SPL55 &amp; SPL70 SERIES</b>												
3" x .095" W (S).....	151	107	87	76	68	62	58	54	51	...	...	...
3 1/2" x .083" W (S).....	165	117	96	83	74	68	63	59	55	53	...	...
3 1/2" x .095" W (S).....	165	117	96	83	74	68	63	59	55	...	...	...
4" x .083" W.....	176	125	103	89	80	73	67	63	59	...	...	...
4 1/2" x .095" W.....	188	133	107	94	83	76	70	66	62	...	...	...
<b>1600, SPL90 &amp; SPL100 SERIES</b>												
3 1/2" x .095 W.....	165	117	96	83	74	68	63	59	...	...	...	...
3 1/2" x .134 W.....	162	115	94	82	73	67	62	58	...	...	...	...
4 x .095 W.....	176	125	103	89	80	73	67	63	...	...	...	...
4 x .134 W.....	188	133	107	94	83	76	70	66	...	...	...	...
<b>1610 &amp; SPL140 SERIES</b>												
3 1/2" x .134 W.....	164	116	95	82	73	67	62	58	...	...	...	...
4 x .134 W.....	176	124	103	88	79	72	66	62	...	...	...	...
4 1/2" x .120 W.....	188	133	107	94	83	76	70	66	...	...	...	...
<b>1710, SPL170 &amp; RPL20 SERIES</b>												
3 1/2" x .156 W.....	162	115	94	82	73	67	62	...	...	...	...	...
4 x .134 W.....	152	108	89	77	69	63	58	...	...	...	...	...
4.095 x .180 W.....	188	133	107	94	83	76	70	...	...	...	...	...
<b>1800 SERIES</b>												
3 1/2" x .188" S.....	152	108	89	77	69	63	...	...	...	...	...	...
4 1/2" x .188" S.....	175	124	101	88	79	72	...	...	...	...	...	...
<b>1810, SPL250 &amp; RPL25 SERIES</b>												
4 1/2" x .259" W.....	184	130	106	92	82	75	...	...	...	...	...	...
<b>1900 SERIES</b>												
4 1/2" x .188" S.....	175	124	101	88	79	72	...	...	...	...	...	...

(S) Exceptions to Tubing Applications:  
 2" x .083" W & 2 1/2" x .065" W used on 1260 thru 1310 Series Only.  
 3" x .095" W used on 1500 Series Only.

3 1/2" x .083" W used on 1480 Series Only.  
 3 1/2" x .095" W used on 1500 & 1550 Series Only.